


System Selected: Tile Backer Board

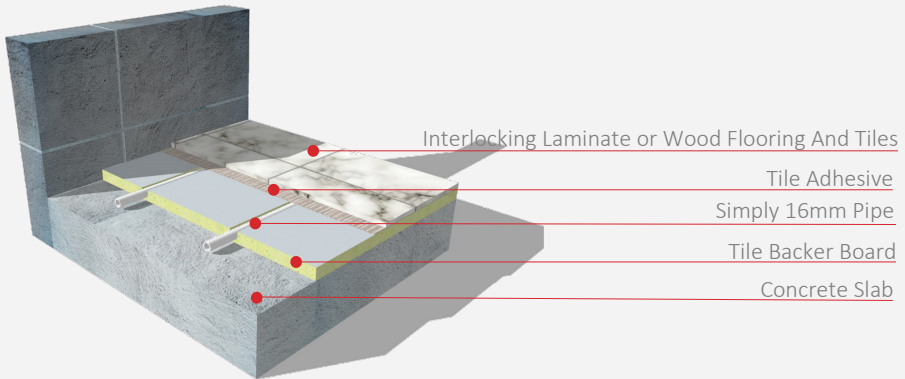

Product Overview:

The Simply Tile Backer Board is a system that can be used when screeding is not an option and ideal when there is limited floor height. The Boards come pre grooved for 150mm or 200mm centers depending on the heat source being used. It has a 20mm insulation with a concrete covering allowing tiles to be laid directly on top.

To fix this board to the concrete below its is recommended to use 9 screws and washers or a tile adhesive. You can then lay 16mm pipe through the grooves into the board.

The boards can accept a direct interlocking wood flooring or laminate which floats on top or apply tile adhesive directly over the board and install tiles if desired. If carpet is going to be laid a 6mm separation layer will be required for example a 6mm ply or tile backer board.

Product Specification

Tile Backer Board	
Dimensions	L: 1200mm W: 600mm D:20mm
Quantity	Sold Individually
System Type	Existing Systems
Centers	150mm or 200mm
Expected Heat Output	65 - 75Kw Per SQM
Construction	Extruded Polystyrene and cementitious finish
Pipe Type	16mm Pert-al-Pert Or EVOH Pipe