


System Selected: XPS Board

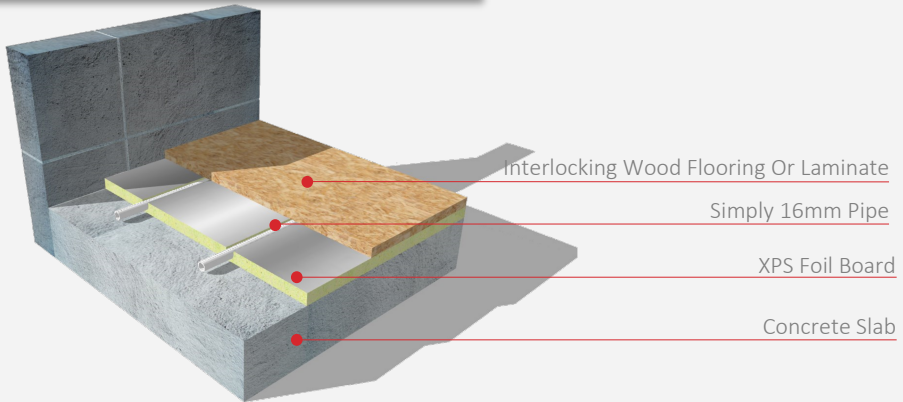

Product Overview:

The Simply XPS board is a popular system when screeding is not an option and ideal when there is not a lot of floor height. The boards come pre grooved for 150mm or 200mm centers depending on the heat source / requirements. It is insulated and foil faced meaning it has better heat retention and will make for a much more efficient system.

When fixing the XPS board to the layer below this can be done with a diluted PVA or a spray carpet adhesive.

The polystyrene is dense meaning it can take an interlocking wood flooring and laminate directly on top. If you wish to lay tile or carpet however there must be a 9mm separation layer, this can be a 9mm ply or tile backerboard which will need to be screwed down into the sub floor.

Product Specification

Simply XPS	
Dimensions (mm)	L: 1200mm W: 600mm D: 20mm
Quantity	Sold Individually
System Type	Existing Systems
Centers	150mm or 200mm
Expected Heat Output	65 - 75Kw Per SQM
Construction	Polystyrene and Foil
Pipe Type	16mm Pert-al-Pert Or EVOH Pipe

Simply XPS	
Thermal Conductivity	0.033 W/mK
Aluminum Thickness	45 Microns
Compressive Strength	400kpa
R Value	0.60
U Value	1.6
Construction	Polystyrene