


System Selected: Position Panel

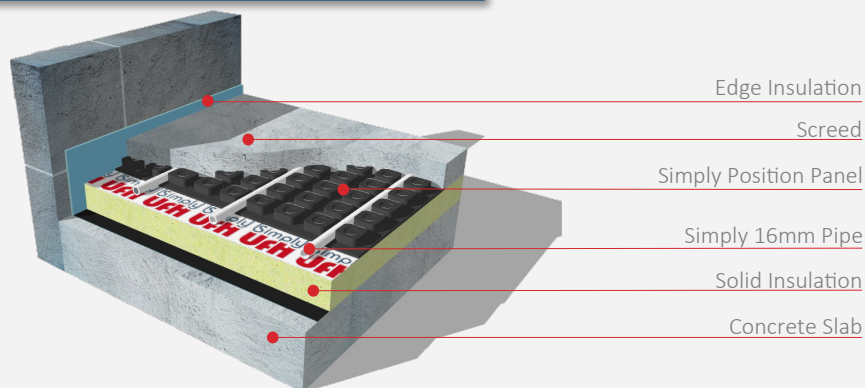

Product Overview:

The Simply Position Panel is an interlocking panel that is used when screeding. The panel acts as a guide to lay pipe straighter and more accurately. The nodes on each panel are 50mm making it easier to lay at 150mm or 200mm centers. The pipe is held firmly in place by the nodes so there is no need for staples.

Once insulation has been laid you can begin to install the pipe position panels, once this has been laid you then can install the pipe at its desired centers within the nodes. As the panels are interlocking there is no need to fix them down however further fixings can be used if preferred to hold the panels in place.

Edge is also installed around the perimeter of the room to provide a barrier against expansion and heat loss. This stops contact from the concrete and screed preventing downward heat loss.

This is then covered with a screed which can be either sand or liquid. It is recommended to speak to a specialist screed supplier with regards to the maximum and minimum levels of screed to use.

Product Specification

Simply Position Panel	
Dimensions (mm)	L: 1220mm W:820mm D:20mm
Quantity	Sold Individually
Centre's	Notches at 50mm, installed at 150 or 200mm centers
Construction	Plastic
Pipe Type	16mm MLCP or EVOH UFH Pipework
Coverage	1m ² Per sheet
Recommended Flow Temperature	45°C
Maximum Loop Length	110m
Expected Heat Output	65-75 Watts Per Sqm